



Finished groundline, top of sidewalk
and/or finished roadway elevation
whichever is adjacent to wall face.

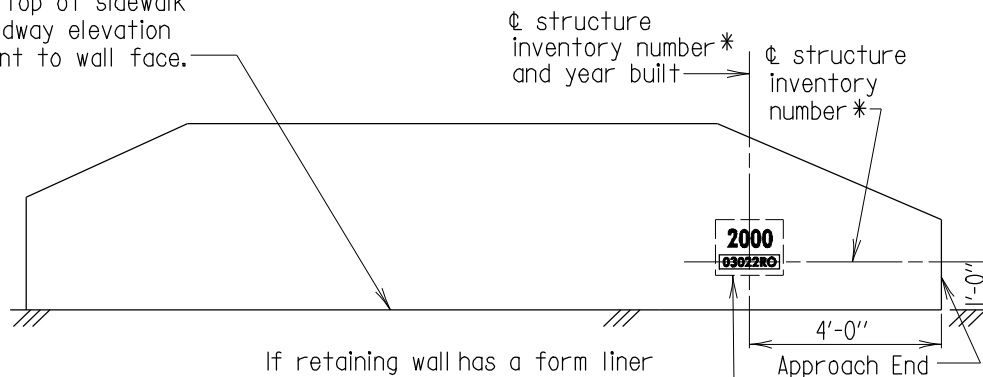

If retaining wall has a form liner finish, a 14" x 18" smooth block shall be formed for placement of the numbers. For see Detail A below for dimensions. See Plans for location of block.

RETAINING WALLS

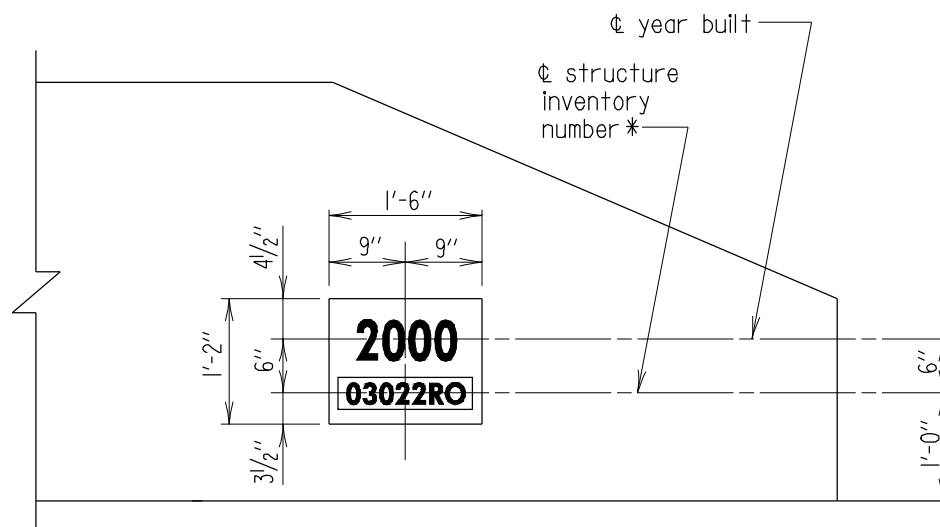

DETAIL A

Notes:

- For existing structures, where a year built is shown on the structure and structure is to be rehabilitated, the marking should read 1942-2000 (old year first - new year).
- For existing structures with no year built contact the Office of Bridge Development for old year.
- For Year Built Numerals refer to Standard No. M(0.07)-99-334.
- For retaining walls that are not visible from the approach roadway, refer to BR-MAINT(0.02)-00-339.

* Black numbers 3" high on a painted white background, (5" x 17").

APPROVAL	
<i>L. S. Friedman</i>	DIRECTOR
OFFICE OF BRIDGE DEVEL.	
DATE: 9/14/99	
REVISIONS	
SHA	FHWA
3-10-00	.
1-22-01	.
9-20-05	.

FHWA APPROVAL
DATE: .

STATE OF MARYLAND
DEPARTMENT OF TRANSPORTATION
STATE HIGHWAY ADMINISTRATION
OFFICE OF BRIDGE DEVELOPMENT

LOCATION OF YEAR BUILT MARKING AND
STRUCTURE INVENTORY NUMBER ON RETAINING WALLS

STANDARD NO. M(0.06)-99-333

SHEET 1 OF 1